

Valve Position Monitor IP67

CMW-BVA Valves

FEATURES

- **Solid and compact design**
Aluminium die-casting housing and powder coating.
- **Bolts on visual position indicator**
- **Quick-set cam**
Spring loaded splined cam.
No need to adjust again after initial setting.
Easy setting without tool
- **Dual cable entries**
2 x 1/2 NPT(Standard)
M20,PG13.5,PF1/2",PT1/2".(Option)
- **Captive cover bolts**
No worry to loose bolts while cover open.
- **Easy mounting bracket**
NAMUR standard stainless steel shaft and bracket.




SPECIFICATION	STANDARD	OPTION	MATERIAL	
Enclosure	Weatherproof IP67/NEMA4 & 4X	IP 68	Housing cover&body	Aluminium die-casting
Ambient temperature	-20°C ~ 80°C		Shaft	Stainless steel
Conduit entries	2 x NPT1/2"	PF1/2",PT1/2" M20,PG13.5	Indicator cover	Polycarbonate
Terminal Strips	8 points (0.08-2.5mm ²)		Indicator	ABS/Polycarbonate
Position indicator	Closed:red Open:yellow	Closed:red Open:green	Cam	Polycarbonate
Switches	Mechanical switch x2 Proximity sensor x2		Spring	Stainless steel
External coating	Polyester powder coating(black)	red,green,blue, yellow,silver color Nylon coated	Housing cover bolt	Stainless steel
Shaft	Standard shaft (17mm)	Long shaft	O -ring	NBR
			Bushing	Bronze
			E-ring(shaft)	Stainless steel
			Earth lug	Stainless steel
			Bracket	Stainless steel

Position indicator



Re-adjustment available upon required direction

Shaft Position

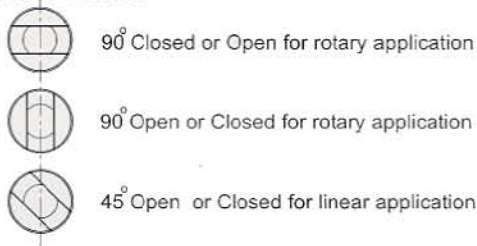

Conduit entries

Cable entry due to length and thickness



Captive cover bolts

Specially designed to prevent losing cover bolts during maintenance or installation.

