

CMW BVA VALVES PTY LTD.

FIG SLC-3


3-PCS SPRING LOADED

CHECK VALVE


THREADED END,

1000 PSI

¼" (DN8) to 4" (DN100)

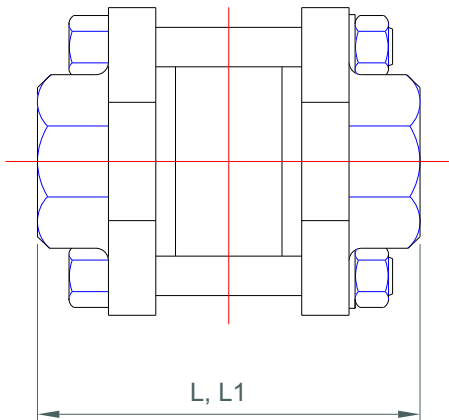

L: SCREW & SOCKET END.
 L1: BUTTWELD END.

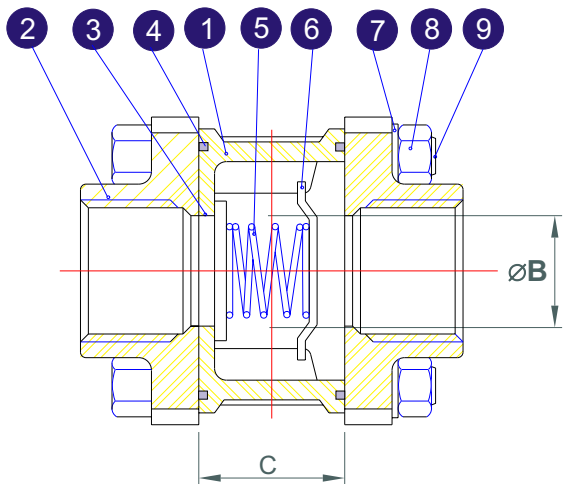

DIMENSIONS (mm)

DN	SIZE IN	ØB	L	L1	C
8	¼"	10.0	56	61	14.0
10	⅜"	10.0	56	61	14.0
15	½"	14.0	65	65	18.0
20	¾"	18.1	70	80	22.0
25	1"	24.2	78	88	27.5
32	1¼"	30.2	96	96	32.0
40	1½"	36.2	102	107	37.0
50	2"	48.3	118	128	47.0
65	2½"	63.0	145	150	47.0
80	3"	76.0	156	171	55.0
100	4"	98.0	185	215	70.0

MATERIALS LIST

NO.	PART NAME	MATERIAL
1	Body	ASTM A351 Gr. CF8M
2	End Cap	ASTM A351 Gr. CF8M
3	Disc	T-316 Stainless Steel
4	Body Seal	15% G.F PTFE
5	Spring	300 Series ST. ST.
6	Spring Holder	T-316 Stainless Steel
7	Washer	SS 304
8	NUT	SS 304
9	BOLT	SS 304